


Smarty Drive Recorder


Accessories for BX1500 Plus Series

(Permanent Power Cable)

The permanent power supply cable will allow you to hard wire the Drive Recorder series to the fuse box of your vehicle.

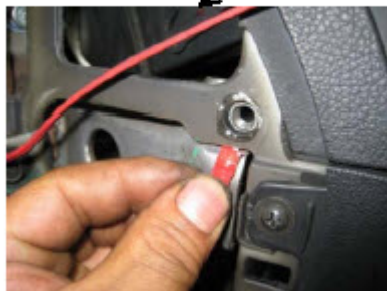

The ground cable should be contacted to the car body/chassis.

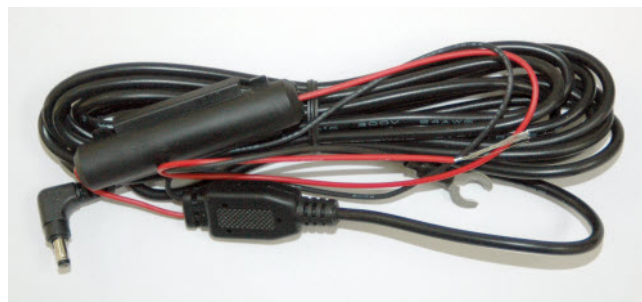

DPWR-100 @ \$28

Connect it to a ACC power at fuse box.

ACC power will be off if we turn off the car engine.

Safe Power Supply Cable

Installation

Check your car voltage before you install and set the red switch to proper voltage of each car. (Normally the passenger car uses 12V and Bus uses 24V.)

- ① Connect the white dotted line Fuse Cable (+) to the fuse box. It should be connected to an battery circuit (Permanent Power).
 - ② Connect the black Ground cable which has Y pin to the chassis of the car or Ground Point.
 - ③ Connect the power connector to the Drive Recorder.
 - ④ Please turn on the Power Switch.
- Please start on the car after first installation.
 - The Drive Recorder could reboot when start the car or open the door.
 - This is related with each car permanent power specifications.



DPWR-200 @ \$58

A safe power supply cable. Connect it to a battery power at fuse box.

Battery power will keep supply the power even though we turn off the car engine.



Before



After

Locking Device @ \$48

Model: LNB-100

The Locking cover can protect the SD card from unwanted removal or tampering.

LNB-100 includes: A locking cover, an end block with two-position lock, and barrel key. End block must be adhered with super glue.



SUC-100: Suction Cup @ \$38

Alternate device to hold Smarty DVR

Important Notes: Self-installation at your own risk.

Trubearing Pte Ltd does not bear any responsibilities for damages done during your self-installation. For your own safety, we recommend you seek help from our authorized mechanics for any installation.